

Quick Start Guide

PETFON HOMEKIT

Contents

PETFON Smart Tracker	
Contact	1
Package content	2
Overview	2
Pre-use settings	3
Product installation	5
Secret cell	5
Battery status	6
PETFON Mesh	
Petfon Mesh	7
Quick Setup	8
Install Mesh	9
Power Key	10
Standard Scenario	11

1.Contact

Note:

Please go to "Help Center" for more advanced functions, you could also scan the following QR code for detailed video guides:



Installation Guide



APP Using Guide

Contact:

Tel: +1-201-657-5353 (7:00-14:30 EST)
Email: ubisighttech@gmail.com



PETFON Smart Tracker

2. Package Content



Charging Box x1



Tracker x1




Controller x1



Charge Cable x2



Loop x2



Band x2

3. Overview




Cellphone

Controller


Trackers

Note: Please always keep your cellphone close to the controller(within 20 yards) while using them.

4. Pre-use Settings

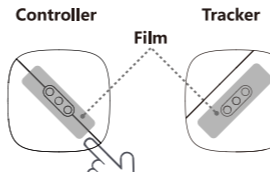

NOTE: Remove this film when using.



Activate devices
Take out controller and trackers, **REMOVE** the bottom film, and **PUT THEM BACK** into charging box. The indicators embded in the trackers and controller would flash blue light when they are successfully activated.

5. Pre-use Settings



Download APP

Scan QR code to download and install Petfon APP. You could also download it from Apple APP store or Google Play directly by searching "Petfon".

6. Pre-use Settings



User Registration

Open Petfon APP, click "Register", enter personal email to obtain a verification code. Check your email and enter the verification code you received. Finalize the registration by creating password.

STEP 1

STEP 2

STEP 3


7. Pre-use Settings



Connect devices

- ① Open APP, tap binding notification on top of the screen to start scanning.
- ② Follow APP Guide to complete binding controller and the 1st tracker.
- ③ Please click "+" icon to bind the 2nd and 3rd tracker.
- ④ Tap "Device" to check connection status.

8. Pre-use Settings

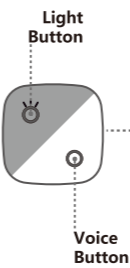

Light Button

Voice Button

Test devices


Press light button on controller to light up trackers, press it again to turn it off.

Press voice button on controller to open ring bell.

STEP 4

STEP 5


9. Product Installation

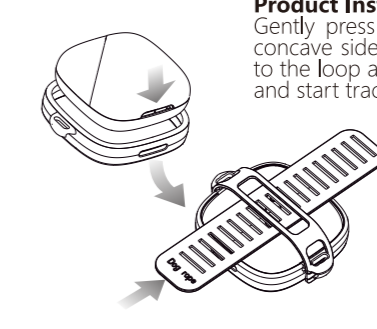

Product Installation

Gently press Tracker down to the concave side of loop, Attach band to the loop as shown in the picture and start tracking.

10. Secret Cell

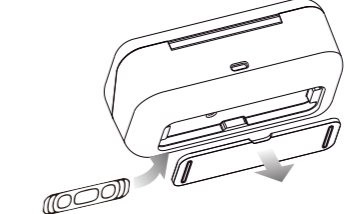

You can keep the band in this secret cell in case it gets lost.

STEP 6

11. Battery Status

① In tracking progress

Indicator	Battery status
Blinking Orange Light	Battery capacity < 20%
Blinking Red Light	Battery capacity < 10%

② In charging process


Place tracker and controller in the Charging box, the charging progress would get started automatically

Indicator	Battery status
Solid Green Light for 5 seconds and goes out:	Fully charged
Blinking Blue Light	Charging

③ Battery status for charging box

Indicator	Battery status
Solid Orange Light	Battery low
Solid Blue Light	Battery sufficient

Charging Box

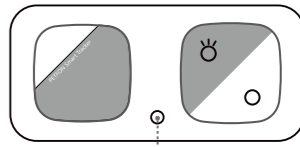


Battery Capacity Indicator

PETFON MESH

PETFON Mesh is one of the main products for PETFON HOME KIT. After binding it with PETFON Controller & Tracker, Petfon's working distance can be effectively extended. It can help you build up your own pet private network which enables you to track and position your pet anywhere anytime with no monthly fee.


1. Packing list

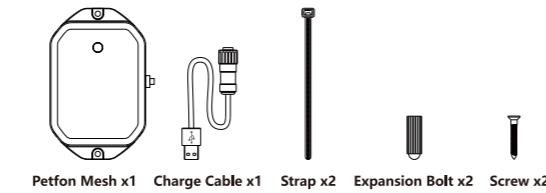

Petfon Mesh x1 Charge Cable x1 Strap x2 Expansion Bolt x2 Screw x2

2. Recharge Mesh

Charging time : 14 hours
Charging : Orange light
Fully Charged : Green light

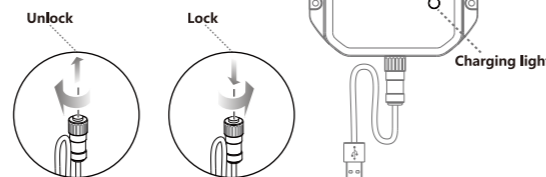

Unlock Lock

Power key

Charging light

3. Quick Setup

(1) Please scan the following QR code and download PETFON APP.



(2) Register and Login, if you already have Petfon APP in your phone, the above two steps can be ignored.

(3) Open Bluetooth in your cellphone.

(4) Go to "≡" → "Devices" → "+" → "Mesh".

(5) Press and hold power key for 3 seconds to turn on Mesh.

(6) Please scan for Mesh to bind with it.

(7) Go to "≡" → "Settings" → "Home".
① Turn on "Home" ② Set your WiFi network
③ Set your home location
Please ensure you have chosen the right location, it will affect Mesh's positioning performance in the future.


(8) Go to "≡" → "Devices" → "Mesh", set Mesh's Work cycle.

(9) Choose a place outside the house where it is two meters above the ground to install Mesh. During this process, check Mesh's signal strength, make sure that Mesh's signal in your selected position can reach three or more grids.

(10) Install Mesh:


Bolt Installation:

- ① Drill a hole with an electric drill
- ② Insert the expansion bolt into the hole
- ③ Tighten the screw in the hole to mount Mesh

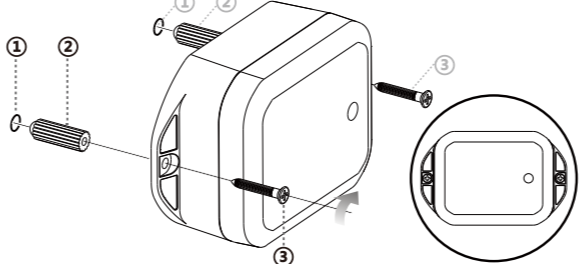

Straps Installation:

- ① Use two straps to pass through the mounting holes
- ② Fix Mesh's position
- ③ Buckle the two straps

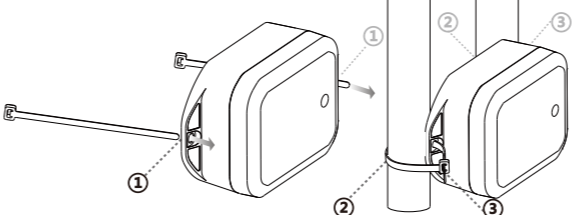

(11) You are ready to go.

4. Power Key


Press for 3s	Turning on/off
Indicator	Turn on Mesh: Indicator lights up Turn off Mesh: Indicator lights off
Quick touch	When Mesh is on, the indicator will light up after touching it

5.Specifications

Name	Petfon Mesh
Bluetooth	BLE 5.0
Battery	15000mAh
Sensor	Temperature sensor/ pressure sensor/ humidity sensor
Interface	USB
Transmitting power	Less than 1W
Battery	Lithium Battery
Weight	571.3g
Size	102.8X159.5X55.7mm
Working temperature	-20 – 60 °C (-4-140°F)
Working range	4.8-9.6km (3-6miles)

6. Standard Scenario

(Cellphone+Internet+Controller+Mesh+Tracker)
Requirements: Home WiFi, Cellular network, Bluetooth.

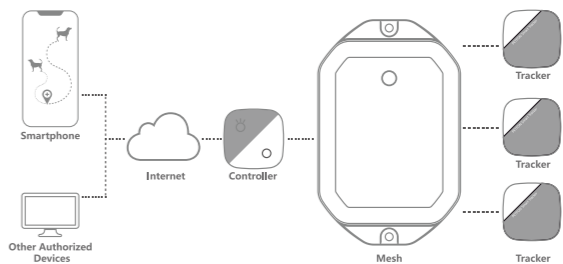

- 1) Connect your cellphone to internet (Cellular network or WiFi).
- 2) Open "Home" in your Controller, and connect it to WiFi network.
- 3) Mount Mesh on a higher place such as a roof or tree, to increase coverage.
- 4) With Mesh, the Tracker's working range can be extended to 3-6 miles. You can check your pet's location in real time with no distance limit.
You could track your pet with no distance limit. Just make sure you have a good internet connection in both your phone and your house. You would be able to check your pets' location anywhere in the world with unlimited range. Controller's power consumption will be relatively higher in this mode, so it is recommended to put it in the charging box for continuous charging.