

# north states™

*Quality Products  
for the way you live*

## INSTRUCTIONS FOR MODELS

8666/8668/8669/8728/8729/8766/8768/8769/8775/8777/8809



**IMPORTANT: PLEASE KEEP FOR FUTURE REFERENCE!**

For helpful tips and instructions, please visit our website: [www.northstatesind.com](http://www.northstatesind.com) or contact our Customer Care department via email: [customerservice@northstatesind.com](mailto:customerservice@northstatesind.com)  
Phone: (763) 486-1756 or Toll Free: (800) 848-8421

**Intended for use with children 6-24 months**

User instructions . . . . .page 3

Instrucciones para el usuario. . . . .página 7

## **⚠️ WARNING**


- Never leave child unattended.
- This product may not prevent all accidents.
- Never use with a child able to open, climb over or dislodge the enclosure.
- To prevent serious injury or death, securely install and use the enclosure according to manufacturer's instructions.
- Use only with the panels securely locked in place.
- To prevent falls, never use the enclosure at top of a stairway.
- This product is intended for use with children from 6 to 24 months of age.
- This enclosure is not intended for use across window openings, or to be screwed into walls or any other solid structures. Do not use it as a barrier for stoves or heaters.
- Do not use this product on a smooth, slippery surface unless the skid-resistant pads are installed.
- Do not use the enclosure if any components are damaged or missing.
- Do not use on uneven surfaces.
- Do not attempt to use this enclosure in temperatures less than 40° F (4° C) or damage may result.
- The enclosure is designed to be used only in configurations having an even number of panels; in other words, configurations having either 4, 6, or a maximum of 8 joined panels.
- Any additional or replacement parts should only be obtained from the manufacturer or distributor.

## **INSTRUCTIONS FOR INSTALLING SKID-RESISTANT PADS**


**Your North States enclosure can now be used on hard surfaces (hardwood floors, tile, linoleum, etc.) by installing the enclosed skid-resistant pads.**

1. Ensure that the surface of the yard panel is clean and dry prior to installing the pads.
2. Remove a single pad from the release paper as shown in FIG. 1 below.
3. Place the adhesive side of the pad on the bottom edge of the yard panel approximately 2" from the center of each hinge, as shown in FIG. 2 below.
4. Repeat steps 2 & 3 for each of the eleven remaining pads.
5. Maximum skid-resistance will be maintained by cleaning the bottoms of the pads periodically with a water-dampened clean cloth.

**FIGURE 1**



**FIGURE 2**

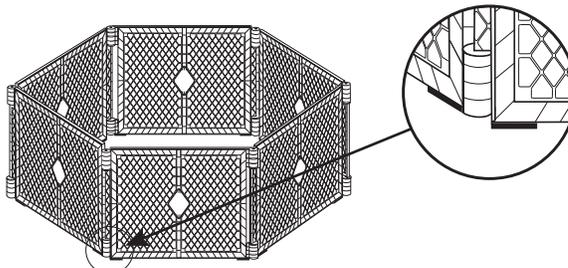

# SET-UP INSTRUCTIONS

Begin setting up your enclosure by unsnapping the gray carrying strap and carefully unfolding the panels to form a hexagon, as shown in FIGURE 3 at right. (NOTE: Model 8768 consists of eight panels which will form an octagon when set up properly. Model 8809 consists of four panels which will form a square.)

When you have finished unfolding the panels, there will be two unconnected panels arranged as shown in FIGURE 4 at right. Make certain that the dark gray carpet foot (D) is up as shown.

Begin connecting the panels together by gently lifting up on panel 1 and setting the opening "A" (as shown in FIGURE 5) over pin "B" located on panel 2.

Now locate the slot on the lower end of cylinder "D" as shown in FIGURE 6. This slot tapers to an opening that accommodates pin "C".

Gently press down on panel 1 while aligning pin "C" with the end of the slot in cylinder "D". While maintaining downward pressure on panel 1, lift slightly on panel 2, and slide pin "C" through the slot and into the opening as shown.

## EXTENSION INSTALLATION

Some models have two-panel extensions that are colored appropriately for your yard are available either from your dealer or direct from the factory (see page 6).

The extension contains two additional panels that enable you to expand the size of your enclosure from 18.5 square feet to 34.4 square feet.

The extension is installed by following the "SET-UP INSTRUCTIONS" that appear above.

FIGURE 3




FIGURE 4

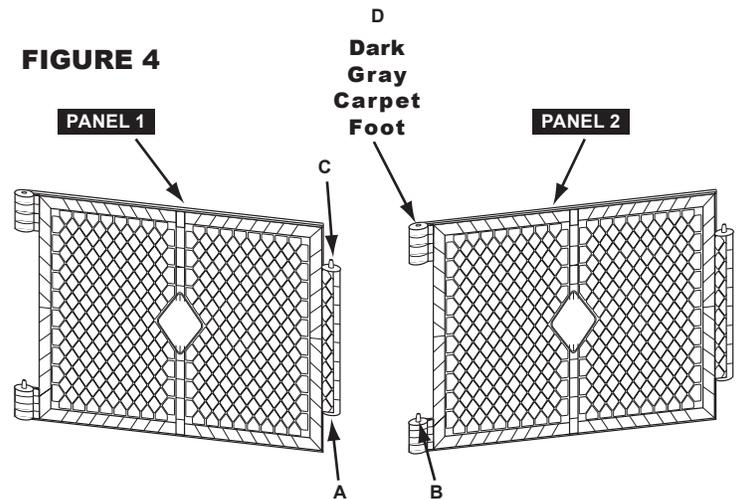


FIGURE 5


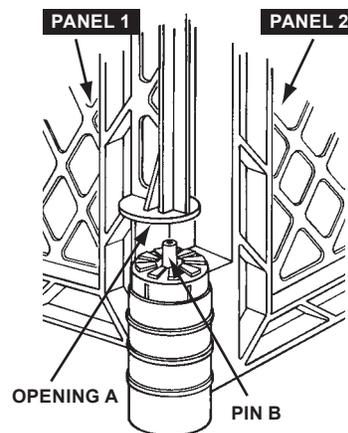



FIGURE 6

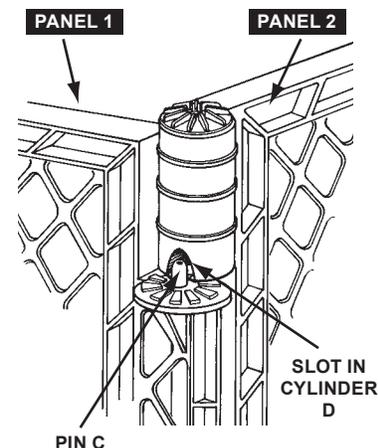

# PROPER SET-UP CONFIGURATIONS

We recommend that you use your Superyard only as an enclosure, not as a barrier. See Figure 7 at right for proper configuration.

**FIGURE 7**

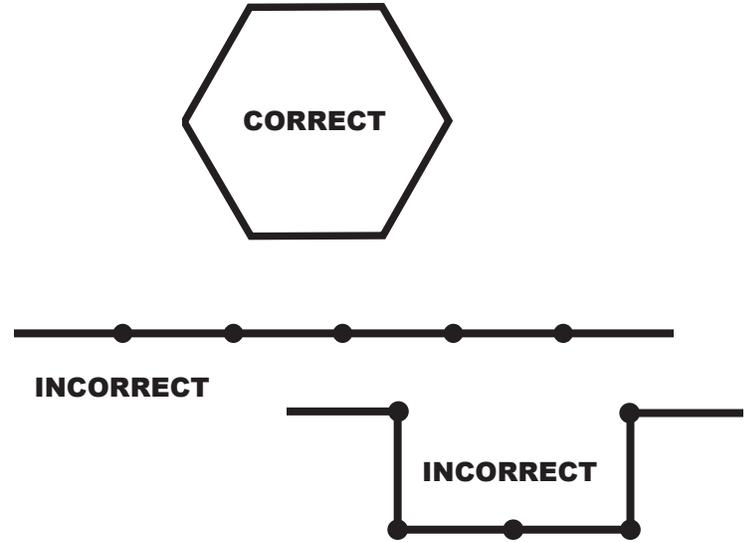


## TO OPEN ENCLOSURE

To disconnect two adjoining panels, select one of the three joints where a dark gray carpet foot is facing up, as shown in FIGURE 8 at right.

Gently press down on panel 1 while lifting slightly on panel 2. This will enable you to slide pin "C" free of cylinder "D" (see figure 6). Then lift up on panel 1 until opening "A" (see figure 5) is free of pin "B".

**FIGURE 8**

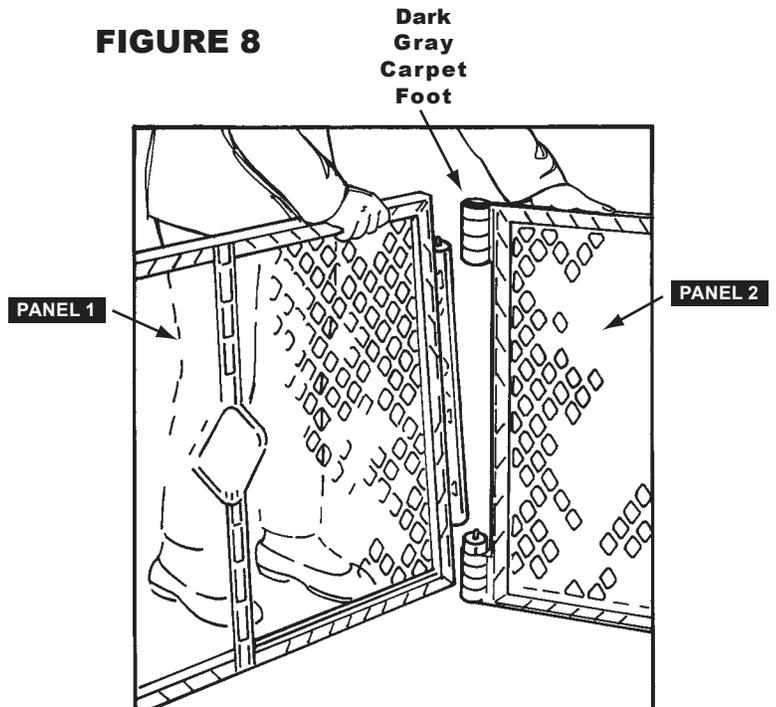

## FOLDING FOR TRANSPORT OR STORAGE

Your enclosure folds compactly for transport or storage. You must, however, fold the panels properly. Disassembly and folding is accomplished by following the “TO OPEN ENCLOSURE” instructions on page 4.

Gently fold the panels (without jerking them or slamming them together) in alternating directions. FIGURE 9 at right illustrates the configuration of a properly folded yard.

Slip one end of the gray carrying strap through the mesh near the top middle of each outside panel and snap it closed. The enclosure is now ready for transport or storage.

## CLEANING INSTRUCTIONS

Your enclosure is manufactured from durable, weather-resistant plastic panels. To clean, wash the panels with mild, non-abrasive detergent, rinse with clean water, and allow to dry thoroughly.


## REPLACING A PANEL

A broken panel can easily be replaced by obtaining one from the manufacturer (see page 6).


Remove the broken panel by following the “TO OPEN ENCLOSURE” instructions (page 4).

Install the replacement panel by following the “SET-UP INSTRUCTIONS” (page 3).

**FIGURE 9**

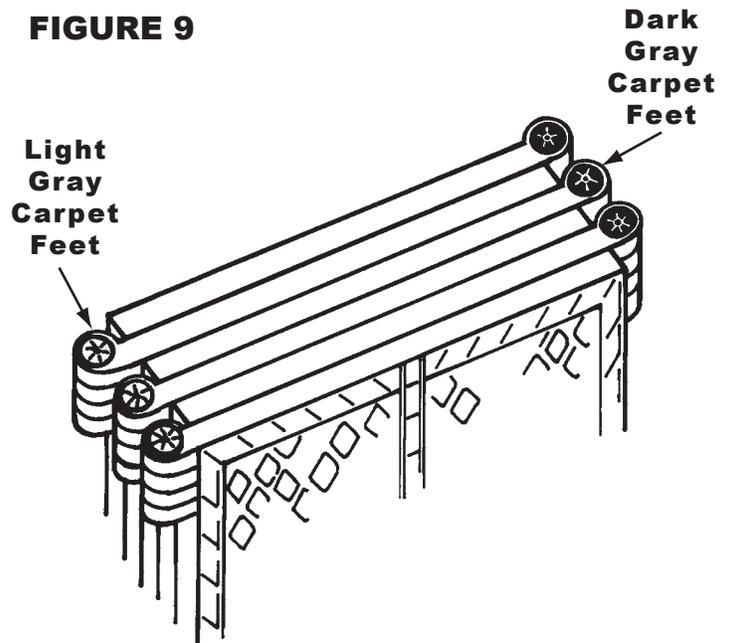

Part Description	Model Numbers	Part Number to Order
Carrying Strap (Gray)	All	10018
Carpet Foot (Dark Gray)	All	11412
Spring	All	11457
Screw	All	11470
Skid-resistant Pads	All	20303
Plunger (Dark Gray)	All	25548
Replacement Panel (1 Panel, Gray)	All 866x Series Products	11411R
Superyard Extension (2 Panels, Gray)	All 866x Series Products	8662
Replacement Panel (1 Panel, Orange)	All 876x Series Products	25542
Replacement Panel (1 Panel, Red)	All 876x Series Products	25543
Replacement Panel (1 Panel, Yellow)	All 876x Series Products	25544
Replacement Panel (1 Panel, Green)	All 876x Series Products	25545
Replacement Panel (1 Panel, Blue)	All 876x Series Products	25546
Replacement Panel (1 Panel, Purple)	All 876x Series Products	25547
Superyard Colorplay Extension (2 Panels, Orange and Blue)	All 876x Series Products	8762
Replacement Panel (1 Panel, Pink)	8728	25906R
Superyard Extension (2 Panels, Pink)	8728	8722
Replacement Panel (1 Panel, Navy)	8729	25907R
Superyard Extension (2 Panels, Navy)	8729	8723
Replacement Panel (1 Panel, Sand)	8775/8777	26009
Replacement Panel (1 Panel, Brown)	8809	25802

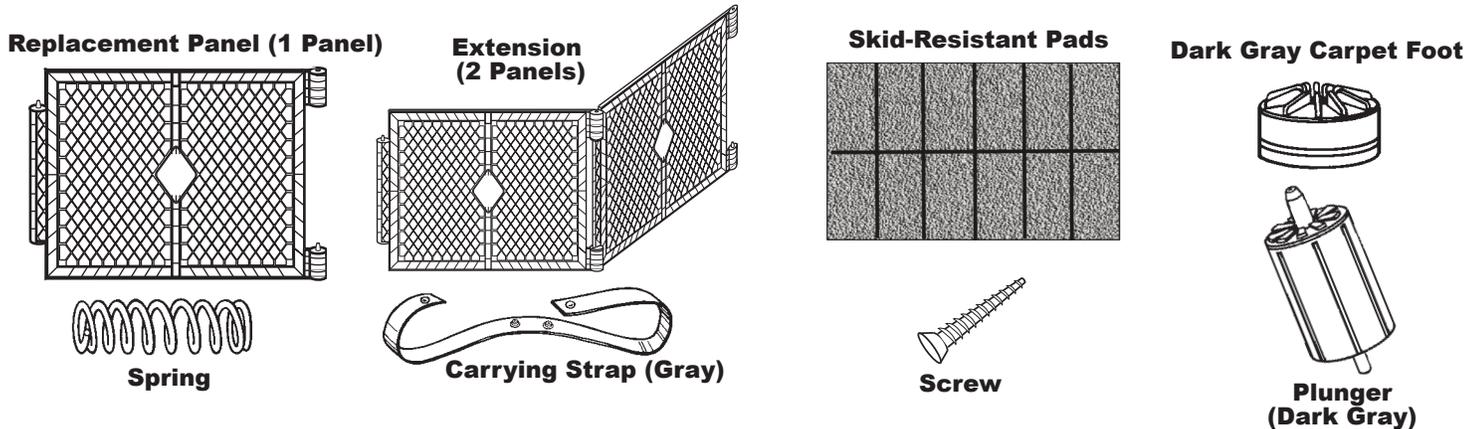

**Parts**

To ensure safe operation, replacement or additional parts should be obtained only from North States or its authorized distributors.

Contact information on cover of these instructions.