


Instructions and Care

Parts Key:

- (A)** Adjustable headrest strap
- (B)** Back strap
- (C)** Underseat elastic cord
- (D)** Cord lock
- (E)** PVC Pipes

To Install:

1. Clip each adjustable strap (A) around your rear seat head rests so that the seat cover aligns with your car seat.
2. **Optional:** There is a back strap (B) that can be attached and clipped around the back of the seat. This is for extra fitted support in vehicles where the seat is able to be folded down.
3. Take the underseat elastic cord (C) and pull down over each side of your car seat bottom. Tighten at each cord lock (D).
4. **Optional:** PVC pipes (E) can be wedged between the vehicle's seat back rest and bottom seat (near the seatbelt slots) for extra stability.

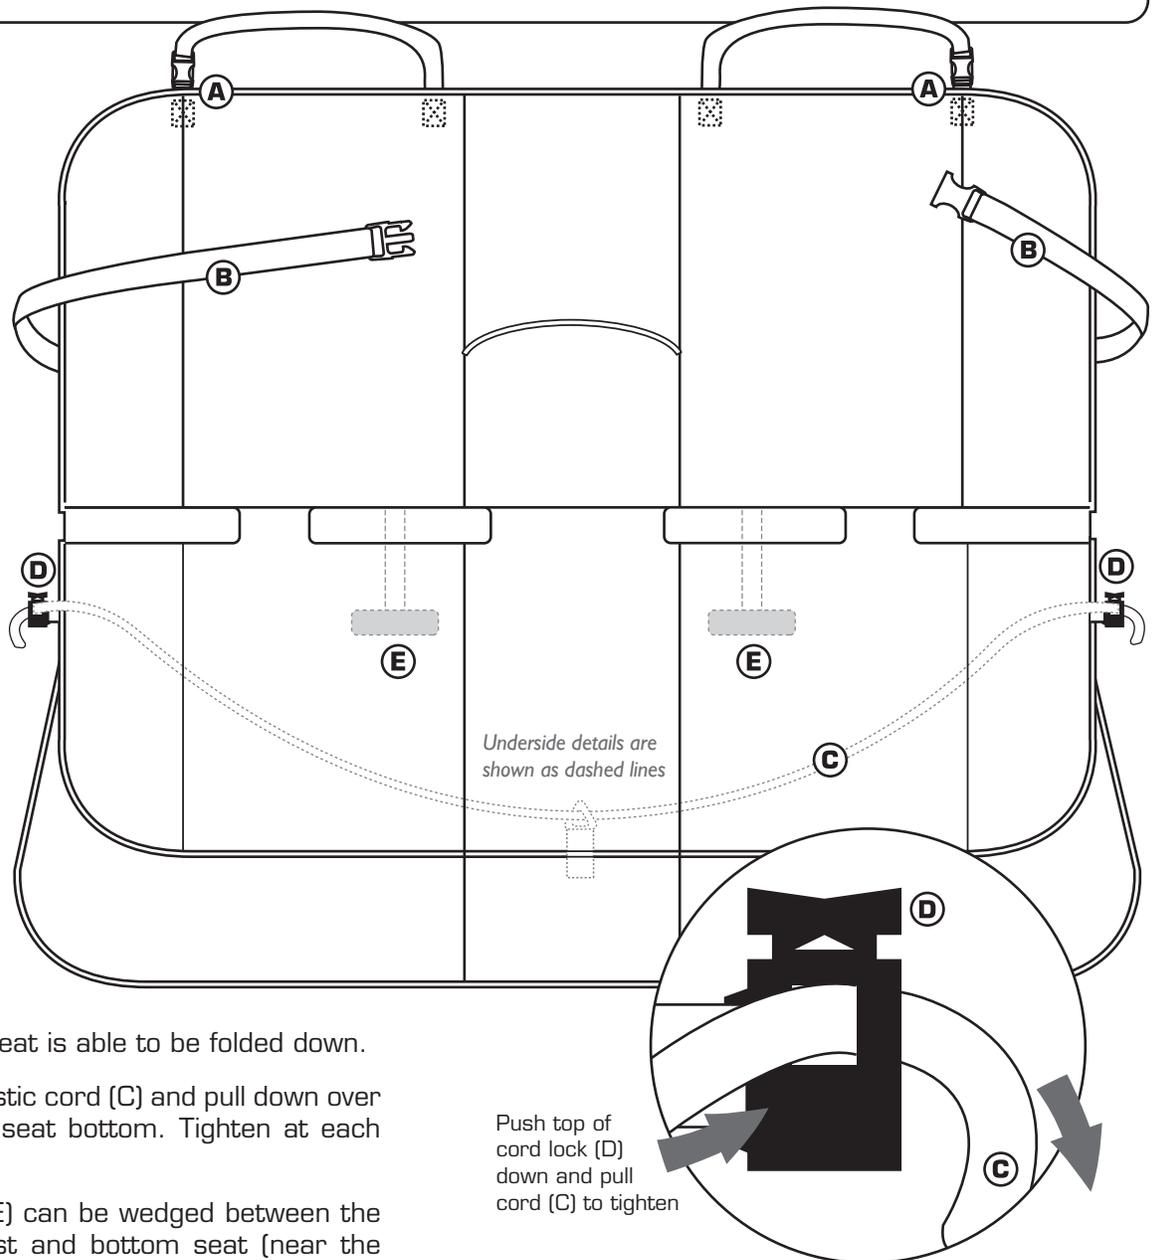

Cleaning Instructions

Our product cleaning instructions will help ensure that your gear has a long, exciting life. In general, washing by hand and hang air-drying is the best way to care for your Kurgo products. However, for the occasions when the mess is too great and time is too tight, we recommend using a washing machine.

Hand Wash Instructions


Note: Recommended for small messes.

1. Brush off loose dirt with a dry brush.
2. Spot clean with a damp sponge, cold water, and mild soap. Avoid harsh detergents.
3. If necessary, rinse larger area to eliminate excess soap residue.
4. Hang to air dry (do not machine dry).

Machine Wash Instructions

Note: Only machine wash gentle in front-loading units (DO NOT use machine with an agitator as it could cause damage not covered under the Kurgo Warranty)

1. Secure all buckles and hardware.
2. Wash with cold water and mild soap. Avoid harsh detergents.
3. Rinse thoroughly to eliminate soap residue.
4. Hang to air dry (do not machine dry).



NOTICE: Please contact Kurgo directly with any product or warranty inquiries.