




*Get started!*




# Happy Ride™ BENCH SEAT COVER

1



Loop the straps over your vehicle's headrests and adjust them for best fit.

2



Reach under the seat cover and push the two white seat anchor tubes between the seat back and seat bottom.

## Pawprints belong on your heart, not on your seats.


3



Stretch the elastic panels over the front corners of the seat.

Optional: If your vehicle's seat type allows, loop the lower straps under the front corners of the seat and pull them tight.

4

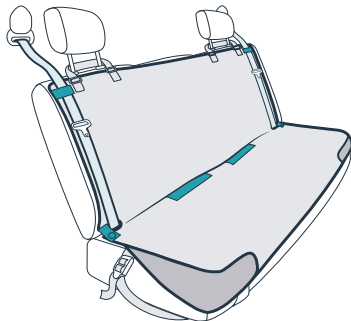

Pass your vehicle's seat belts under the hook and loop tabs and through the slits at each side of the seat cover.

The seat belt buckles are easily accessible through the slits at the center of the seat cover. Keep these slits closed when not in use.

Let us help!

For questions or additional tips:

+1 (800) 732-2677

[petsafe.com](https://petsafe.com)

1-Year Warranty

©2019 Radio Systems Corporation

Models: 62313, 62416, 62425, 62433, 62434, 62435, 62446 | JE400-2285

For important safety information, please see the customer care guide.

live *happy* together.